


This product is now approved for use in SIL2 rated applications.

In order to use this product in a SIL2 rated application, it must be wired so that automatic self-test mode is enabled. The following wiring diagram shows how to do this.

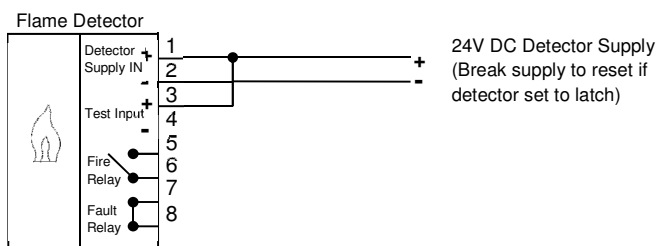

In self-test mode, the detector will check each of its sensors every fifteen minutes. If the test fails a Fault will be signalled.

Refer to the manufacturer for further information.